

Plant No:

Description:

Serial No:




Contract number:

New: ☐

Pre Hire: ☐

Thorough Examination : ☐

Off Hire Test: ☐

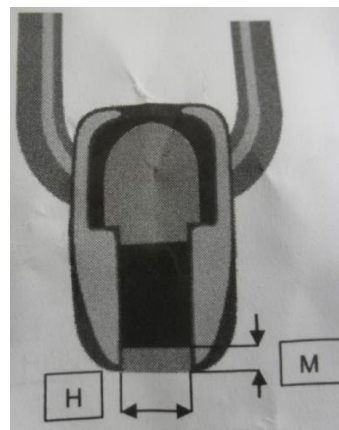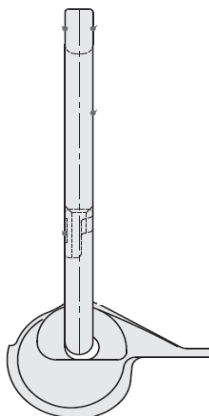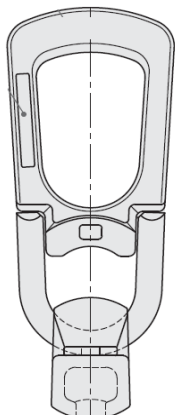

Examination area/ Instructions

Comments/Measurements

Pass Fail

Check the general and overall condition of the lifter. Use the above drawings if necessary.

☐
☐

Check and record that the unique serial/plant number is stamped on the top of lifter. Make sure CE mark and W.L.L are legible.

☐
☐

Check the device and use the above drawing to indicate any sharp edges, sign of wear, damage, distortion or security concern. Check also where the shackle will cause wear & tear top part lifting eye. The wear tolerance gap H should be a maximum of 24mm and the thickness of M a minimum of 9mm. This should be regularly checked.

☐
☐
☐
☐

Inspect device for any foreign debris that may prevent smooth operation. Clean if necessary.

☐
☐

Lift test operation & use of the lifter device with appropriate ELITE blocks ONLY

☐
☐

The results of all hire inspection must be entered onto the computer system

☐
☐

**Equipment which displays evidence of incorrect operation should be withdrawn from service
Equipment should be cleaned and correctly stored after checking**

Print Name

Checked by:

Signature:

Date: