


MESUREMENTS OF BLOCK GRAB SG80/SG100

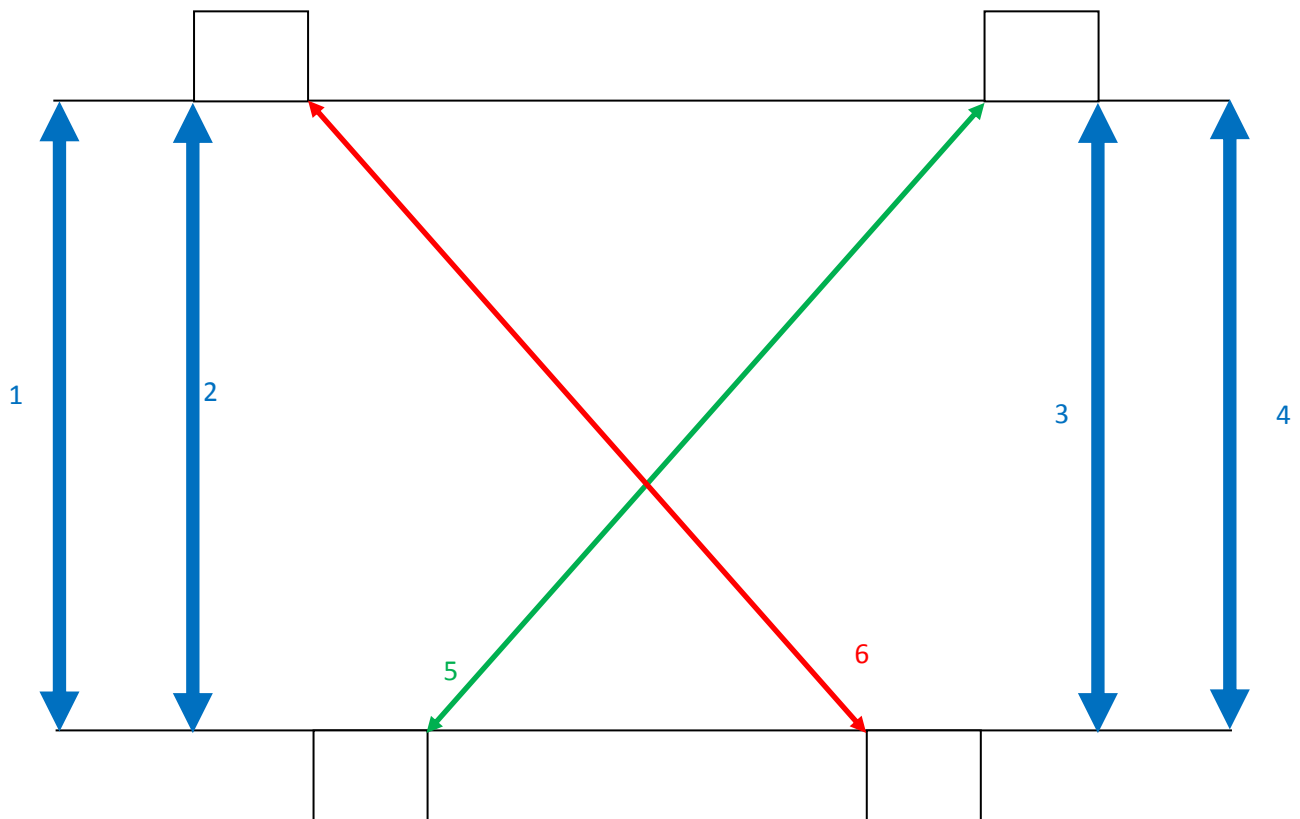

Top view while tensioned slightly above ground

Distance between gripping bar back plates with main legs	Diagonal	5	6	Oppo-site	1	2	3	4
--	-----------------	---	---	------------------	---	---	---	---

Make sure that the distance between the gripping bar back plates at their point of contact with main leg .Not at the rubbers. Use one datum point only. These measurements must be the same on both sides $\pm 8\text{mm}$. Any variation from this must be referred to a competent person